





180 UL 3740 / AWM

UL 3740, CSA, 180°C, 600V

- The First UL / CSA 180°C Irradiated Fluoro-elastomer Lead Wire
- Exceptional Chemical and Fluid Resistance
- Exceptional Oil Resistance Even at Elevated Temperatures
- Very Thin OD, yet Extremely Tough
- Won't Melt, Creep or Flow
- Potential Cost Savings vs. 200°C Wires Like FEP

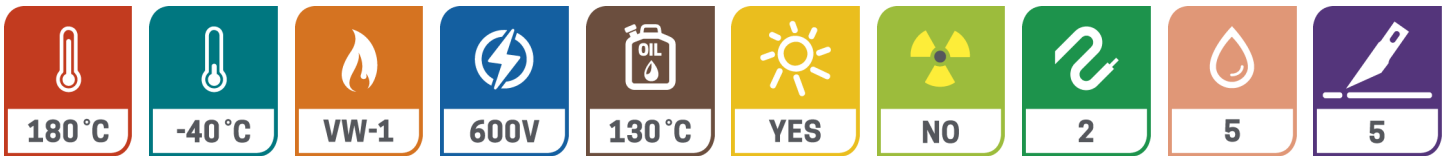

Product Number	Standard Conductors Tinned Copper	Nom. Conductor Diameter		Nom. Insulation Thickness		Nom. Finished Diameter		Nom Finished Weight (lbs/mft)	Ampacity (40°C, Free Air)
		in.	mm.	in.	mm.	in.	mm.		
180-24/XX-E0	24 (19/36)	.024	.61	.016	.41	.057	1.45	2.5	8
180-22/XX-B0	22 (7/30)	.030	.76	.016	.41	.062	1.58	3.4	15
180-22/XX-E0	22 (19/34)	.031	.79	.016	.41	.063	1.60	3.5	15
180-20/XX-B0	20 (7/28)	.038	.97	.016	.41	.070	1.78	4.9	19
180-20/XX-E0	20 (19/32)	.038	.97	.016	.41	.071	1.80	5.1	19
180-18/XX-B0	18 (7/.0152)	.045	1.14	.016	.41	.077	1.96	6.5	26
180-18/XX-D0	18 (19/.0092)	.045	1.14	.016	.41	.077	1.96	6.4	26
180-16/XX-F0	16 (19/.0117)	.058	1.47	.016	.41	.092	2.34	10	33
180-14/XX-H0	14 (41/30)	.071	1.85	.016	.41	.107	2.72	15	50
180-12/XX-J0	12 (65/30)	.089	2.26	.016	.41	.121	3.07	23	64
180-10/XX-J0	10 (65/28)	.111	2.81	.017	.43	.145	3.68	34	85
180-08/XX-X0	8 (84/27)	.147	3.73	.024	.61	.195	4.95	64	115
180-06/XX-X0	6 (84/25)	.183	4.65	.024	.61	.231	5.87	97	160
180-04/XX-L0	4 (133/25)	.263	6.68	.024	.61	.311	7.90	150	205
180-02/XX-M0	2 (259/26)	.323	8.20	.024	.61	.371	9.42	231	274
180-01/XX-M0	1 (259/25)	.372	9.44	.030	.76	.432	10.97	295	319

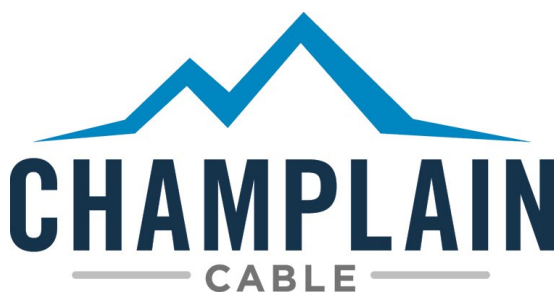




180

UL 3740 / AWM

PROPERTIES	EXAR 180
Approvals / Listings:	
UL	UL STYLE 3740
CSA	AWM I A/B
Physical Properties:	
Temperature Rating (UL 3740)	180°C
Voltage Rating (Vrms)	600V
Scrape Abrasion Resistance	818 cycles
Shore "A" Hardness	NA
Shore "D" Hardness	80
Cold Bend - 4h @ -40°C	Passes
Bend Radius	5- 9 Overall Diameter
Tensile Strength:	
Unaged	6,050 psi
Retention after 7 days @ 210°C	Pass (> 85%)
Elongation:	
Unaged	410%
Retention after 7 days @ 210°C	Pass (> 110%)
Flame Test:	
VW-1 / FT1	Passes
Oil Resistance 135°C maximum.	
1500 hrs. @150°C	Tensile -16% Elongation -57%
Chemical Resistance	
Acetone	Swell @23°C** 0%
Acid - H2SO4 S.G. 1.260 5%	Swell @23°C** 0%
Engine Oil - ASTM D-471 IRM-902	Swell @50°C** 0%
Benzene	Swell @23°C/24h 0%
Epoxy	Swell @23°C/24h <1%
Gasoline - ASTM D-471 Fuel C	Swell @23°C** 0%
Methanol	Swell @23°C/24h 0%
Toluene	Swell @23°C/24h 0%
Xylene	Swell @23°C/24h 0%
Electrical:	
Dielectric Constant	7.4
Dielectric Breakdown Strength (Vrms)	19,000
Oxygen Index:	42

We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product combination for their own purpose. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss and damage arising from the handling and use of our products whether used alone or in combination with other products

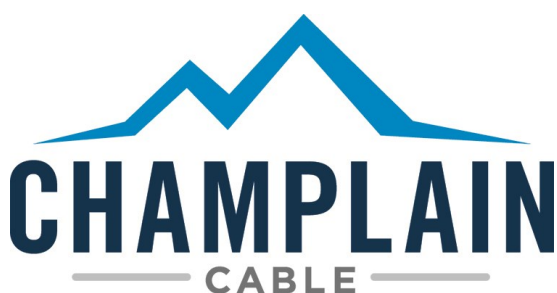

Manufacturing Locations:

Colchester, Vermont

El Paso, Texas

www.champcable.com