



Rugged Ethernet

100 Ω, 125°C & 150°C, 60V ROHS Compliant

Champlain Cable has been producing 100ohm Ethernet Cables for over 30 years and 150°C Battery Cables for over 20 years. Our Rugged Ethernet cables combine the best of both technologies. We employ state-of-the-art, in-line processing and measurement systems to ensure consistent quality. Champlain Cable also participates in SAE and OPEN committees to help define the future of these Vehicle Ethernet standards.


- EXRAD® Irradiation Cross-linked Materials Provide Robust, Long-Term Performance
- TWISTIR™ Technology Helps Maintain Pair Balance Which is a Key Factor in Electrical Performance
- 125°C & 150°C Options
- Additional Shielded Designs Available, Contact Factory for Details
- DATARAD® Automotive Ethernet Products Meet Electrical requirements after ISO-6722-1 Heat-Aging. This Ensures Performance Over Time!
- Meets ISO-6722-1 Flame Requirements
- 1000 Base T1 Designs are In-Test. Contact Factory for Details
- Higher Voltage Options Available



Product Number	Conductor Size & Strand	Construction	Dielectric	Shield	Jacket	Nominal OD	ISO-6722-1 Temp Rating	Electrical Performance
E-E-0.75-2-J-U	0.75mm ² 19/.23mm BC	2TP	150UT	No	Y	8.80mm	125°C	Cat 5E
E-E-0.50-2-J-U	0.50mm ² 19/.18mm BC	2TP	150UT	No	Y	7.60mm	125°C	Cat 5E *
E-E-0.75-2-J-U 150	0.75mm ² 19/.23mm BC	2TP	150UT	No	Y	8.80mm	150°C	Cat 5E
E-E-0.50-2-J-U 150	0.50mm ² 19/.18mm BC	2TP	150UT	No	Y	7.60mm	150°C	Cat 5E *
E-E-0.50-1-J-U	0.50mm ² 19/.18mm BC	1TP	150UT	No	Y	4.72mm	125°C	100 Base T
E-E-0.35-1-J-U	0.35mm ² 7/.25mm BC	1 TP	150UT	No	Y	3.61mm	125°C	100 Base T
E-E-0.75-2-J-S	0.75mm ² 19/.22mm BC	2TP	150UT	Yes	Y	14.41mm	125°C	Cat 5E *
E-E-20-1-J-S	20AWG (19/32) BC	1TP	150UT	Yes	Y	7.04 mm	125°C	100 Base T

* Max length 75meters

Oct-18

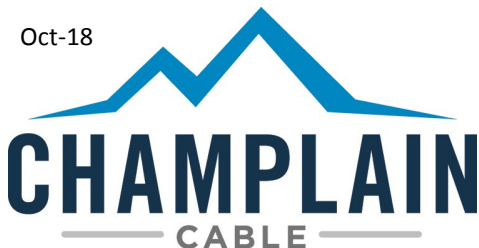

www.champcable.com





Rugged Ethernet

Category 5E Test	Category 5E Requirement		Typical performance (0.75mm ²)
Characteristic Impedance	100+/- 10% Ohms		103 Ohms
Insertion loss	Frequency	Loss (dB)	Loss (dB)
	1	< 2.0	1.4
	10	< 6.5	5.3
	31.25	< 11.7	10.1
	100	< 22.0	19.4
Return Loss	Frequency	Loss (dB)	
	1	> 20.0	44
	10	> 25.0	35
	20	> 25.0	34
	31.25	> 23.6	34
	100	> 20.1	28
PSELFNEXT	Frequency	Loss (dB)	
	1	> 65.3	83
	10	> 50.3	60
	20	> 45.8	58
	31.25	> 42.9	54
	62.5	> 38.4	54
	100	> 35.3	45

Open Alliance 100 BaseT Test	Open Alliance 100 BaseT Requirement		Typical performance (0.35mm ²)
Characteristic Impedance	100+/- 10% Ohms		98 Ohms
Insertion loss	Frequency	Loss (dB)	Loss (dB)
	1	< 0.9	0.3
	10	< 2.4	1.0
	33	< 4.65	2.00
	66	< 6.75	3.22
Return Loss	Frequency	Loss (dB)	
	1	> 20.0	35.9
	10	> 20.0	32.9
	20	> 20.0	36.0
	33	> 14.8	36.8
	66	> 14.58	30.0
Mode Conversion	Frequency	Loss (dB)	
	1	> 46.0	55
	10	> 46.0	55
	20	> 46.0	55
	33	> 46.0	55
	66	> 42.0	55
	100	> 38.0	50
	200	> 34.0	50
Propagation Delay	780 ns/100 Meters Max.		547 ns

ISO 6722-1 Class D Thin Wall			EXRAD 150 UT	
Section	Description	Requirement	Typical Results (0.75mm ² Sample)	
5.7	Insulation Volume Resistivity	10 ⁹ Ω /mm min.	6.43 10 ¹⁸ Ω /mm	Pass
5.8	Pressure at High Temperature	0.8N @150°C no dielectric breakdown	no breakdown	Pass
5.9	Strip Force / Adhesion	Per customer agreement	35N	Pass
5.10	Low Temperature Winding	3 turns 2.5kg - 40°C no dielectric breakdown	no dielectric breakdown	Pass
5.11	Impact	100gm @-40°C no breakdown	no breakdown	Pass
5.12.4.1	Sandpaper Abrasion	.2kg 350mm min	730mm	Pass
5.12.4.2	Scrape Abrasion	Per customer agreement	2430	Pass
5.13	Long-Term Heat Aging	150°C 3000 hours	no breakdown	Pass
5.15	Thermal Overload	200°C 6 hours	no breakdown	Pass
5.16	Shrinkage by heat	2mm max. 150°C	no shrinkage,	Pass
5.17	Fluid Compatibility	All fluids	>5% swell	Pass
5.19	Ozone Resistance	45°C 85% Relative Humidity 70 hours, Ozone 50 +/- 5 pphm 1kV 1 min. (no breakdown)	no breakdown	Pass
5.20	Resistance to hot water	not less than 10 ⁻⁵ ohm-mm	5.35 X10 ¹⁴ ohm-mm	Pass
5.21	Temperature and Humidity Cycling	40 - 8 hours cycles -40°C and 125°C 80 -100% relative humidity	no dielectric breakdown	Pass
5.22	Resistance to Flame Propagation	70 sec. max. 50mm unburned	8 sec. after burn	Pass

We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product combination for their own purpose. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss and damage arising from the handling and use of our products whether used alone or in combination with other products