



CAN-Bus J-1939 Cable




125°C / 150°C, 60V, 120Ω, ROHS Compliant

- EXRAD® Irradiation Cross-linked Materials Provide Robust Performance
- Shielded Options Protect Signal from EFI / RFI
- Options Available with Primaries that Exceed TXL Performance
- Many Options Available to Fit Various Connectors
- Champlain is a Technological Leader in Controlled Impedance Cables in Vehicle Markets
- EXRAD® Materials are Dielectrically Clean which Provide for Excellent Electrical Performance
- TWISTIR® Technology Helps Maintain Twist Integrity and Electrical Performance
- Highly-Rugged Dual-jacket (D) Designs Available



Part Number	Conductor	Cap. pF/ft	Nom. Velocity	Conductor Nom. OD		Dielectric Nom. OD		EXRAD® Dielectric Insulation	Shield	EXRAD® Jacket Insulation	Filler	Nom. Finished OD	
				in	mm	In	mm					in	mm
23-00013	.5mm ² (19/18) TC	12	58%	.035	0.89	0.94	2.39	150A	Yes	150A (D)	Yes	.325	8.26
23-00028	.5mm ² (19/18) BC	12	58%	.035	0.89	0.94	2.39	150A	Yes	150A (D)	No	.325	8.26
23-00036	.5mm ² (19/18) BC	12	64%	.035	0.89	0.94	2.39	150 UT	Yes	150 FX (D)	No	.325	8.26
23-00037	18 AWG (19/.23) BC	12	64%	.045	1.14	.126	3.20	150 UT	Yes	150 FX (D)	No	.398	10.11
23-00033	.5mm ² (19/18) BC	11	72%	.035	0.89	.106	2.69	Cell-Rad	Yes	125 ZH	Yes	.300	7.62
23-00065	18 AWG (19/.23) BC	11	72%	.045	1.14	.137	3.48	Cell-Rad	Yes	125 ZH	Yes	.352	8.95
23-00072	.5 mm ² (19/18) BC	10	80%	.035	0.89	.092	2.34	Cell-Rad	Yes	150 FX	Yes	.275	7.99
23-00076	.5 mm ² (19/18) BC	10	80%	.035	0.89	.106	2.69	150 FX	Yes	125 ZH	Yes	.291	7.39
15-08559	.5 mm ² (19/18) BC	10	80%	.035	0.89	.093	2.36	Cell-Rad	Yes	EXRAD ERGOFLEX™	Yes	.260	6.60
23-00098	18 AWG (16/30) BC	11	64%	.044	1.12	.132	3.35	125 ZH	Yes	EXRAD ERGOFLEX™	Yes	.362	9.18
15-07271	20 AWG (7/28) BC	11	64%	.038	0.97	.082	2.08	150 UT	No	125 ZH	No	.204	5.18
15-07445	20 AWG (7/28) BC	11	64%	.038	0.97	.082	2.08	150 UT	No	150 FX	No	.230	5.84
15-07508	20 AWG (19/32) BC	11	64%	.038	0.97	.082	2.08	150 UT	No	150 FX	No	.230	5.84
23-00074	20 AWG (7/28) BC	12	66%	.038	0.97	.072	1.83	XLPE	No	125 ZH	No	.208	5.28
23-00070	0.8mm ² (19/.23) BC	11	64%	.042	1.07	.084	2.13	150 UT	No	125 ZH	No	.211	5.36
15-07272	18 AWG (19/.23) BC	11	64%	.045	1.14	.092	2.34	150 UT	No	150 FX	No	.226	5.74
15-07353	18 AWG (19/.23) BC	11	64%	.045	1.14	.092	2.34	150 UT	No	125 ZH	No	.217	5.51

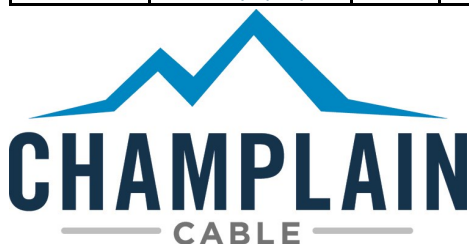




CAN-Bus J-1939 Cable

Property / Attribute		SAE J-1128 TXL Req.	150A	150 UT	150 FX	EXRAD ERGOFLEX	125ZH	
Dielectric Test	Wet Dielectric after 5 hour soak	1 kV 1 min.	5 kV 30 min	5 kV 30 min	5 kV 30 min.	5 kV 30 min.	5 kV 30 min	
Flame Test	Maximum time after burn	70 Sec	<1 sec	9 sec	4 sec	2 sec	10 sec	
Cold Bend	4 hours at temperature no cracks / breakdown	-40°C	-55°C	-55°C	-70°C	-40°C	-55°C	
Temperature Rating	240 Hour heat aging	155°C	180°C	180°C	180°C	180°C	155°C	
Temperature Rating	3,000 Hours	125°C	150°C	150°C	150°C	150°C	125°C	
Tensile	Minimum psi	1,500	2,350	3,000	3,300	2,200	3,000	
Elongation	Minimum %	150	300	375	430	350	220	
Abrasion	Sand Paper Resistance Length in. (14 awg)	8.5	12	65	45	40	31	
Abrasion	Scrape Cycles (14 awg)	None	N/A	N/A	148	N/A	250	
Pinch	Pounds	9	N/A	10.2	18	N/A	9	
Ozone Test	192 Hours @ 65°C, 100 pphm no cracks	Pass	Pass	Pass	Pass	Pass	Pass	
Engine Oil	ASTM D471, IRM-902	50 +/--3°C	15% Max.	1.8%	1%	1.6%	3.2%	5%
Gasoline	ASTM D471 Ref. Fuel C	23 +/--5°C	15% Max.	<1%	2%	<1%	7.5%	3%
Brake Fluid	SAE-J-1703	50 +/--5°C	None	<1.5%	2%	<1%	Pending	1%
Ethanol	85% Ethanol + 15% ASTM D471, Ref. Fuel	23 +/--5°C	15% Max.	<1%	1%	<1%	4.7%	1%
Diesel Fuel	ASTM D471, 90% IRM-903 + 10% p-xylene	23 +/--5°C	None	1.3%	2%	1.8%	2.7%	1%
Power Steering	ASTM D471, IRM-903	50 +/--3°C	30% Max.	1.5%	1%	1.2%	4.1%	9%
Auto Transmission	Citgo #33123 SAE-J311	50 +/--3°C	25% Max.	<1%	3%	5.3%	3.2%	11%
Methanol		23 +/--5°C	15% Max.	<1%	1%	<1%	Pending	1%
Engine Coolant	50% Ethylene GlycoL + 50% distilled Water	50 +/--3°C	15% Max.	1.4%	<1%	0%	<1%	<1%
Battery Acid	H ₂ SO ₄ Specific Gravity = 1.260 +/- .005	23 +/--5°C	5% Max.	<1%	<1%	<1%	<1%	<1%

We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product combination for their own purpose. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss and damage arising

Oct-23
200r4

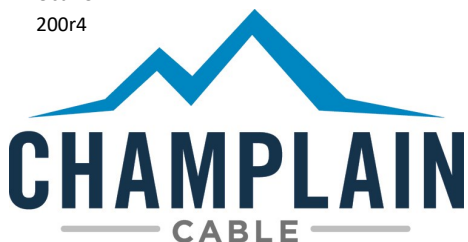

Manufacturing Locations:
Colchester, Vermont
El Paso, Texas
www.champcable.com