



Exrad-RSX Transit Wire

XLPO, 600V & 2000V, -55°C to +125°C

- Highly Engineered EXTRAD® Irradiation Crosslinked XLPO Insulation System
- Superior Fluid Resistance and Durability
- Very Flexible Insulation Materials
- Conformance to Applicable North American and European Rail Transit Standards including AAR RP-585/S-501, NYCT-TX
- Flame Retardant
- NFPA 130 Compliance

CABLE CONSTRUCTION:


Conductor: Flexible AWG TC in accordance with ASTM B-33, AAR S-501, RP-585 and NYCT-TX

Insulation: EXTRAD RAIL RSX irradiation cross-linked XLPO insulation system

Print: As required, including part number, date of manufacture and traceability

APPLICATIONS / STANDARDS:

- NYCT-TX - Approved by NYCT.
- AAR RP-585/S-501 – Wiring and Cable Specification
- NFPA 130 – Standard for Fixed Guideway Transit and Passenger Rail Systems – 2023
 - Section 8.6.7.1.1.1
 - FT4/IEEE1202 Flame Testing of Cables for use in Cable Tray
 - ANSI/UL 1685 – For total smoke released and peak smoke release rate
- Passes UL VW-1 Flame Test and ICEA S-95-658 with less than 3 seconds after burn
- 49 CFR Part 238 – Passenger Equipment Safety Standards: Smoke Generation
- ASTM E662 – Optical Density of Smoke Generated by Solid Materials
- BSS 7239 – Combustion Toxicity for Wire and Cable

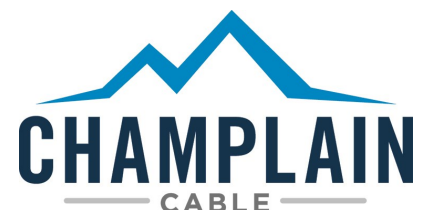



Exrad-RSX Transit Wire

600V

Product Number	AWG (TC)	TX Stranding	Conductor Diameter	Conductor Resistance Max @ 25C	Min Ave. Insulation Wall	Finished OD (nom)	Net Weight lbs/KFT (nom)
EXRAD-RSX-600V-18	18	19/30	0.044	6.21	0.030	0.108	10
EXRAD-RSX-600V-16	16	19/29	0.049	4.79	0.030	0.113	13
EXRAD-RSX-600V-14	14	19/27	0.065	3.04	0.030	0.129	18
EXRAD-RSX-600V-14b	14	37/30	0.070	3.22	0.030	0.134	18
EXRAD-RSX-600V-12	12	19/25	0.078	1.91	0.030	0.142	25
EXRAD-RSX-600V-12b	12	37/.0133	0.093	1.75	0.030	0.157	28
EXRAD-RSX-600V-10	10	27/24	0.107	1.05	0.030	0.171	38
EXRAD-RSX-600V-8	8	37/24	0.130	0.750	0.045	0.230	63
EXRAD-RSX-600V-6	6	61/24	0.185	0.463	0.045	0.285	102
EXRAD-RSX-600V-4	4	105/24	0.260	0.275	0.045	0.360	152
EXRAD-RSX-600V-2	2	150/24	0.315	0.193	0.045	0.415	222
EXRAD-RSX-600V-1	1	225/24	0.350	0.130	0.052	0.464	311
EXRAD-RSX-600V-1/0	1/0	273/24	0.392	0.107	0.052	0.522	396

2,000V

Product Number	AWG (TC)	TX Stranding	Conductor Diameter	Conductor Resistance Max @ 25C	Min Ave. Insulation Wall	Finished OD (nom)	Net Weight lbs/KFT (nom)
EXRAD-RSX-2000V-18	18	19/30	0.044	6.21	0.045	0.138	14
EXRAD-RSX-2000V-16	16	19/29	0.049	4.79	0.045	0.143	17
EXRAD-RSX-2000V-14	14	19/27	0.062	3.22	0.045	0.156	23
EXRAD-RSX-2000V-12	12	19/25	0.078	1.91	0.045	0.172	32
EXRAD-RSX-2000V-12b	12	37/.0133	0.093	1.75	0.045	0.187	33
EXRAD-RSX-2000V-10	10	27/24	0.107	1.05	0.045	0.201	52
EXRAD-RSX-2000V-8	8	37/24	0.130	0.750	0.055	0.250	75
EXRAD-RSX-2000V-6	6	61/24	0.185	0.463	0.055	0.305	109
EXRAD-RSX-2000V-4	4	105/24	0.260	0.275	0.055	0.380	166
EXRAD-RSX-2000V-2	2	150/24	0.315	0.193	0.055	0.435	252
EXRAD-RSX-2000V-1	1	225/24	0.350	0.130	0.065	0.488	323
EXRAD-RSX-2000V-1/0	1/0	273/24	0.392	0.107	0.065	0.532	383
EXRAD-RSX-2000V-2/0	2/0	323/24	0.440	0.091	0.065	0.580	479
EXRAD-RSX-2000V-3/0	3/0	454/24	0.545	0.066	0.065	0.685	594
EXRAD-RSX-2000V-4/0	4/0	551/24	0.570	0.054	0.065	0.710	771
EXRAD-RSX-2000V-262	262	646/24	0.627	0.046	0.105	0.851	951
EXRAD-RSX-2000V-313	313	777/24	0.695	0.038	0.105	0.919	1166
EXRAD-RSX-2000V-373	373	925/24	0.745	0.032	0.105	0.965	1364
EXRAD-RSX-2000V-444	444	1110/24	0.820	0.026	0.105	1.050	1611
EXRAD-RSX-2000V-535	535	1332/24	0.895	0.0220	0.105	1.135	1927

We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product combination for their own purpose. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss and damage arising from the handling and use of our products whether used alone or in combination with other products